


傾斜センサ、モジュール									
SCA61T	SCA830		SCA100T	SCA103T	SCA121T-D03/05/07	SCL1700-D01			
センサ型式	軸	レンジ	供給電源	出力	オフセット温度特性	感度	帯域幅	メカニカルデザイン	寸法
SCA61T-FAHH1G	1軸	$\pm 0.5g \pm 30^\circ$	5V	Analog/SPI	$\pm 0.86^\circ (-40...+125^\circ C)$	4V/g	18Hz	SMD	10.48x11.31x5.08
SCA61T-FA1H1G	1軸	$\pm 1g \pm 90^\circ$	5V	Analog/SPI	$\pm 0.86^\circ (-40...+125^\circ C)$	2V/g	18Hz	SMD	10.48x11.31x5.08
SCA830-D07	1軸 Y	$\pm 1g \pm 90^\circ$	3-3.6V	SPI	$\pm 25mg (-40...+125^\circ C)$	900 Count/g	18Hz	SMD	8.6x7.6x3.3
SCA100T-D01	2軸 XY	$\pm 0.5g \pm 30^\circ$	5V	Analog/SPI	$\pm 0.86^\circ (-40...+125^\circ C)$	4V/g	18Hz	SMD	15.58x11.31x5.08
SCA100T-D02	2軸 XY	$\pm 1g \pm 90^\circ$	5V	Analog/SPI	$\pm 0.86^\circ (-40...+125^\circ C)$	2V/g	18Hz	SMD	15.58x11.31x5.08
SCA103T-D04	1軸	$\pm 0.26g \pm 15^\circ$	5V	Analog/SPI	$\pm 0.29^\circ (-40...+125^\circ C)$	16V/g	18Hz	SMD	15.58x11.31x5.08
SCA103T-D05	1軸	$\pm 0.5g \pm 30^\circ$	5V	Analog/SPI	$\pm 0.29^\circ (-40...+125^\circ C)$	8V/g	18Hz	SMD	15.58x11.31x5.08


SCA121T-D03	2軸 XY	$\pm 1g \pm 90^\circ$	7V -35V	Analog	$\pm 0.2^\circ (0...+70^\circ C)$	2V/g	18Hz	Module	外形寸法図参照
SCA121T-D05	2軸 XY	$\pm 1g \pm 90^\circ$	5V	Analog	$\pm 0.2^\circ (0...+70^\circ C)$	2V/g	18Hz	Module	外形寸法図参照
SCA121T-D07	2軸 XY	$\pm 0.5g \pm 30^\circ$	7V -35V	Analog	$\pm 0.2^\circ (0...+70^\circ C)$	4V/g	18Hz	Module	外形寸法図参照
SCL1700-D01	2軸 XY	$\pm 10^\circ$	7V -35V	Analog	$\pm 0.2^\circ (0...+70^\circ C)$	12V/g	3Hz	Sub-assy	45x45x10mm

*仕様は予告無く変更されることがあります。

SCA61T/100T/103T外形寸法図

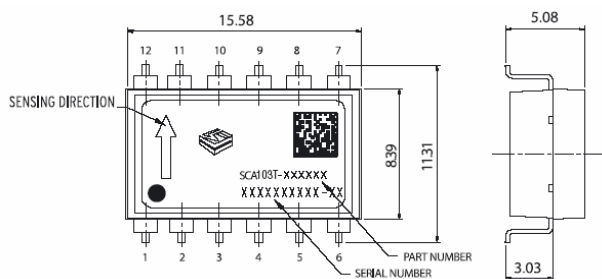

SCA830外形寸法図

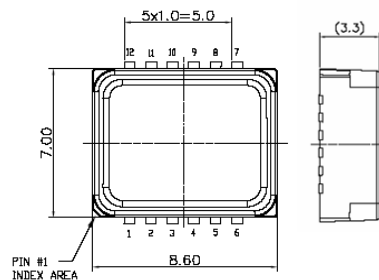

SCA121T-D03/05/07 外形寸法図

